


KOENIG & BAUER

ttPRINT XS

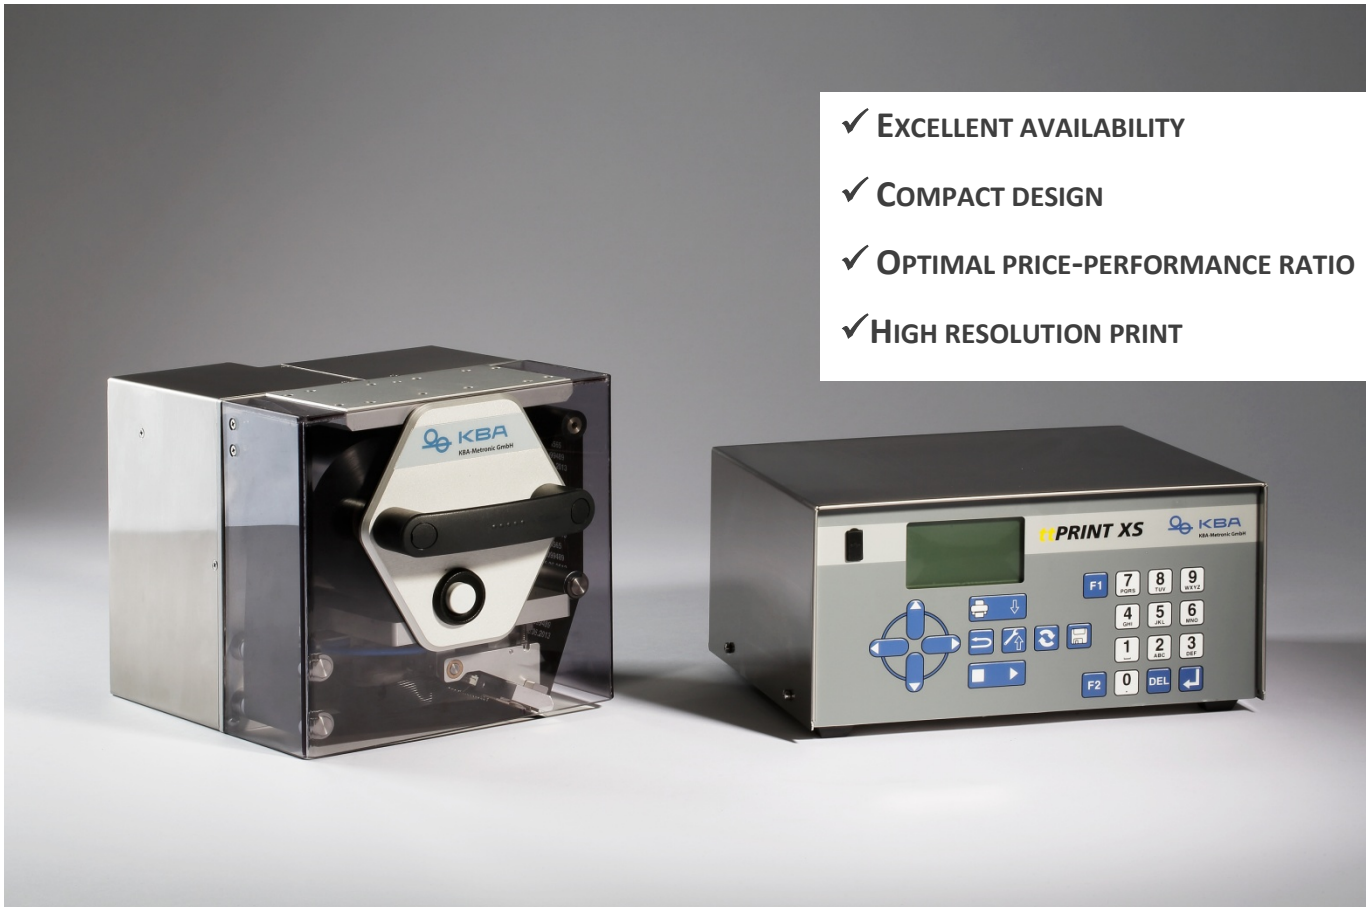

- ✓ EXCELLENT AVAILABILITY
- ✓ COMPACT DESIGN
- ✓ OPTIMAL PRICE-PERFORMANCE RATIO
- ✓ HIGH RESOLUTION PRINT

Simple. Runs. Adaptable.

INKJET Thermal Transfer Overprint

Hot foil-Coding *LASER* **Thermal-Inkjet** *Offline coding*

For use-by-dates **AFTER SALES** *BARCODE* **etc.**

CODING SYSTEMS

„MADE IN GERMANY“

Print

- Printing area up to 53 x 40 mm
- intermittierender Modus
- Print quality: 300 dpi
- Speed: up to 400 mm/sec.
- Internal fonts: Helvetica Bold, Helvetica Roman, Swiss Light, Baskerville, Brush Script, Monospace, 6 Pixel Fonts und 6 Proportional Fonts.
- 1D-Codes, 2D-Codes, Composite Codes



Touch Panel (optional)

Operation

- Interactive 8,4" TFT-Touchscreen Display with comfortable operating interface
- up to four printing heads
- Control unit
- PC

Interface


- Serial: RS232C, 1200 ...115200 Baud
- USB 2.0
- Ethernet / LAN interne 10/ 100 Base-T

Storage media

- 3 x USB (for keyboard and USB-Sticks)
- 1 x Compact Flash

Housing

- small space requirement
- cable guiding up, down, behind or sideways of the unit

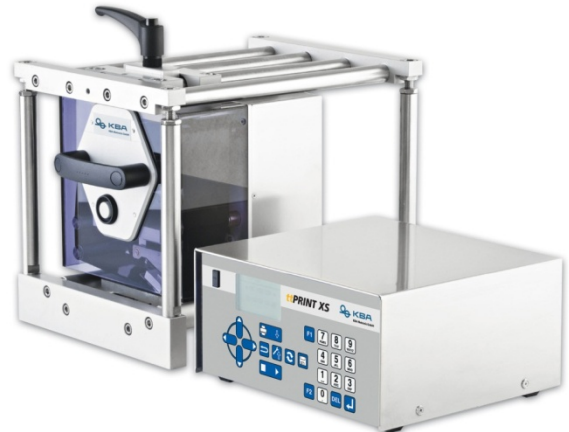

Standard equipment


- Wear-free transfer ribbon transport system; Standard: transfer ribbon Inkside Out
Option: Inkside In
- Ribbon saving device
- Left and right handed version
- Message editing possible whilst printing
- 4-line display
- Memory card drive (CF cards)
- Real date / time coding
- Status inputs / outputs
- Download ConfigTool (Freeware)
- Download Windows print driver (Freeware)

Technical data

Dimensions:	Print head unit: 190 x 180 x 208 mm, L x W x H Control unit: 242 x 117 x 220 mm, L x W x H
Weight:	Print mechanism 6 kg Control unit incl. cable 3,7 kg Mounting frame: ca. 9 kg
Air connection:	min. 6 bar dry und oil-free, pressure regulator is standard
Ink foil:	max. length 600 m, Ø max. 82 mm
Temperature:	+ 5° to + 40° C, relative humidity max. 80 %
Noise level:	< 72 dB
Power requirements:	110 V – 230 V / 50 – 60 Hz Max. power consumption 360 VA

Options

- Touch Panel 8,4", 640 x 480 px.
- CF Cards up to 2 GB
- Mounting frame
- design software ttGRAPHIC
- SAP-connection
- Database connection

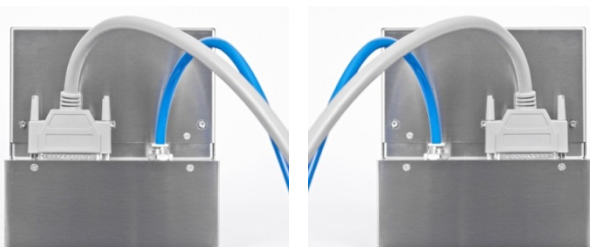

Subject to technical and design changes.
E&OE